



# Chain and Tire Replacement - MX500 / MX650 / SX650


**Tools required:** Phillips screwdriver and two (2) 19mm wrenches.

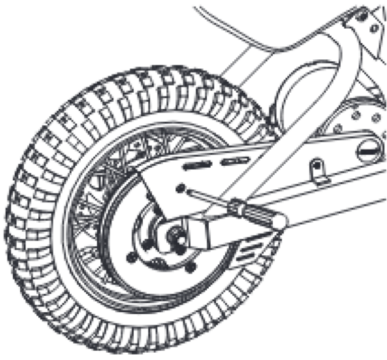

**1** Loosen screw and remove chain guard.

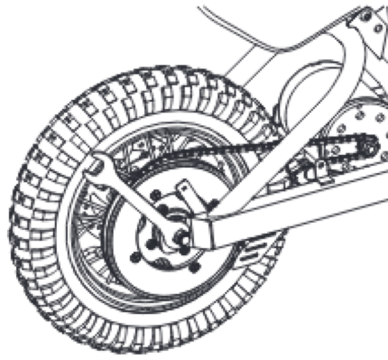

**2** Using two 19mm wrenches, loosen both axle nuts.

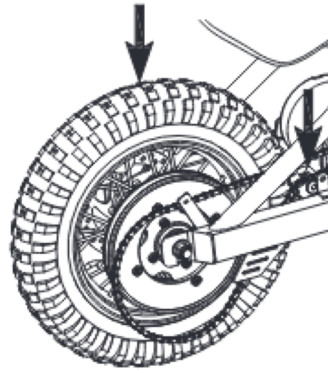

**3** Push the chain tensioner down to loosen the chain and remove the chain from the wheel sprocket and motor sprocket. Push and remove the wheel downward.

**Note:** Your hands will get greasy doing this.




**Note:** the arrangement of the hardware sequence:

## Right Side (Throttle)


Nut  
Washer  
Spacer

## Left Side (Brake)

Nut  
Washer  
Spacer

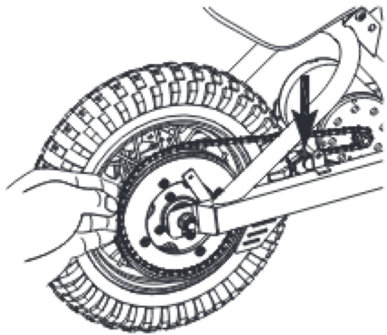

**4** Install the new chain or wheel by slipping the chain around the axle. Slide the axle into the slots on the frame. Slide the chain tensioner down and maneuver the chain onto the rear sprocket and front sprocket.

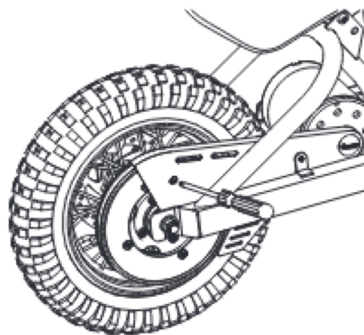

**5** Re-attach the chain guard. Test ride and check. Readjust as needed.