



DIRT QUAD BATTERY INSTALLATION INSTRUCTION

Tools Needed:

- A. 3mm Allen Wrench
- B. 4mm Allen Wrench
- C. 5mm Allen Wrench

- D. 6mm Allen Wrench
- E. No. 10 Open Wrench
- F. Phillips Head Screw Driver

⚠ WARNING: Turn off the main power switch before proceeding with the following instructions.

Step 1:

Use the rear carry handle to carefully lift Dirt Quad up on front end. Using a 5mm allen wrench, remove the 4 bolts on the bottom of the battery cover. Using a 3mm allen wrench, remove the 2 bolts on the support bracket (Figure 1). Using the rear carry handle, slowly lower the Dirt Quad back down to the ground. Save bolts for reassembly.

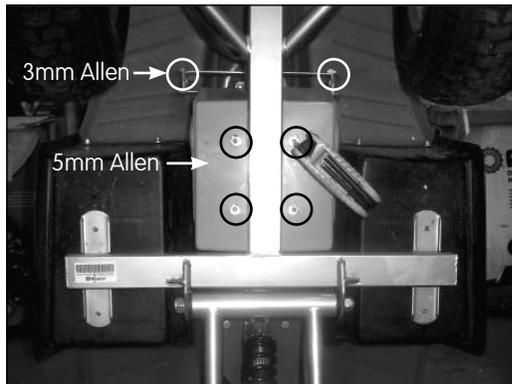


Figure 1

Step 2:

Using a 6mm allen wrench, remove the 4 bolts on the handlebar clamps and detach handlebars. (Figure 2)

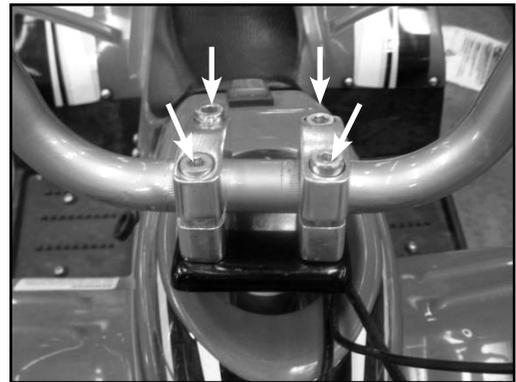


Figure 2

Step 3:

Using a 5mm allen wrench, remove the 4 bolts on both sides of the footrest platforms. (Figure 3)



Figure 3

Step 4:

Using a # 10 open wrench, remove the 2 bolts underneath the rear fender. (Figure 4)

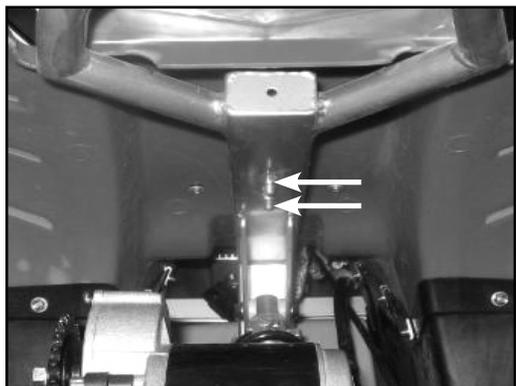


Figure 4

Need Help? Visit our website for additional instructions at www.razor.com or call toll-free at **866-467-2967** Monday - Friday 8:00am - 5:00pm Pacific Time.

Step 5:

Lift up the plastic body (Figure 5a). Carefully maneuver it around the top of the steering tube (Figure 5b)

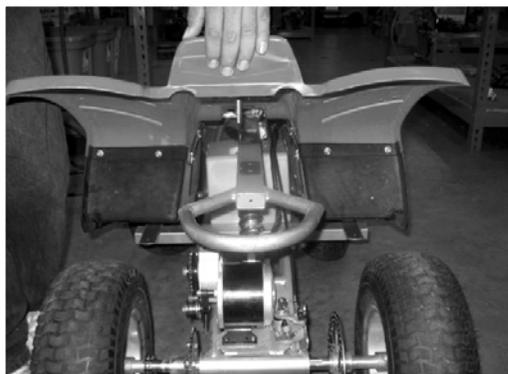


Figure 5a



Figure 5b

Step 6:

Using a Phillips screw driver, remove the 3 screws on the right side (as if riding product) of the battery cover. (Figure 6)

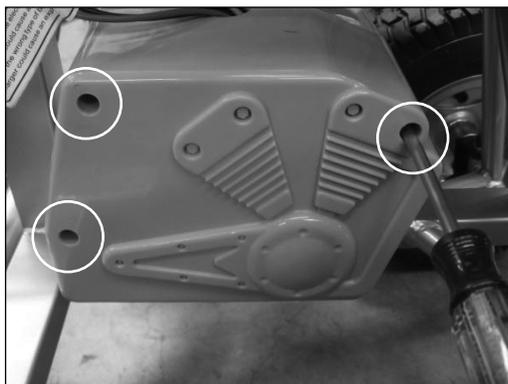


Figure 6

Step 7:

Remove both sides of the battery covers. (Figure 7)



Figure 7

Step 8:

Disconnect the connector between the battery and the control module (Figure 8)

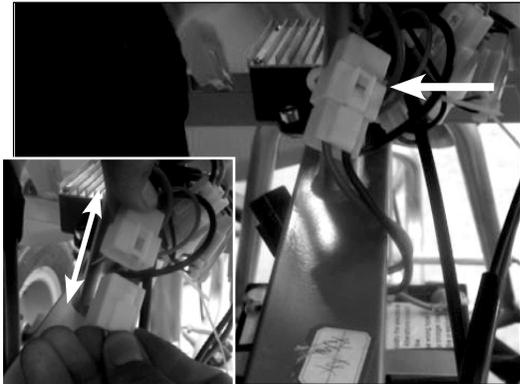


Figure 8

Step 9:

Using a 4mm hexagonal allen wrench, remove the 2 bolts (1 on each side) on the battery strap. (Figure 9)



Figure 9

Step 10:

Use both hands to carefully lift out the batteries. (Figure 10)



Figure 10

Step 11:

1. Place the new battery inside the battery tray.
2. Re-fasten the battery strap around the battery.
3. Re-connect the battery to the control module.

***Note:** Check that all connectors are securely attached, especially to the power switch as it is possible connector(s) may get detached when lifting up the plastic body.

4. Re-attach the battery cover.
5. Lower the plastic body back down over the main frame and re-fasten the 2 bolts to the to the rear fender.
6. Re-fasten the 4 bolts on both of the footrest platforms.
7. Re-attach the handlebars.
8. Lift Dirt Quad up and re-fasten the bolts to the battery cover and support bracket.
9. Carefully lower Dirt Quad back down; installation complete.

Attention: Charge battery for 18 hours before initial use.

Need Help? Visit our website for additional instructions at www.razor.com or call toll-free at **866-467-2967** Monday - Friday 8:00am - 5:00pm Pacific Time.